



# Asus ROG G751JL-BB17T29 Top Rear Panel

Prerequisite guide for the removal of the Top Rear Panel.

Written By: Kristofer Cesaroni



## INTRODUCTION


Prerequisite guide for the removal of the Top Rear Panel.

---

### TOOLS:


- [Tweezers](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Top Rear Panel

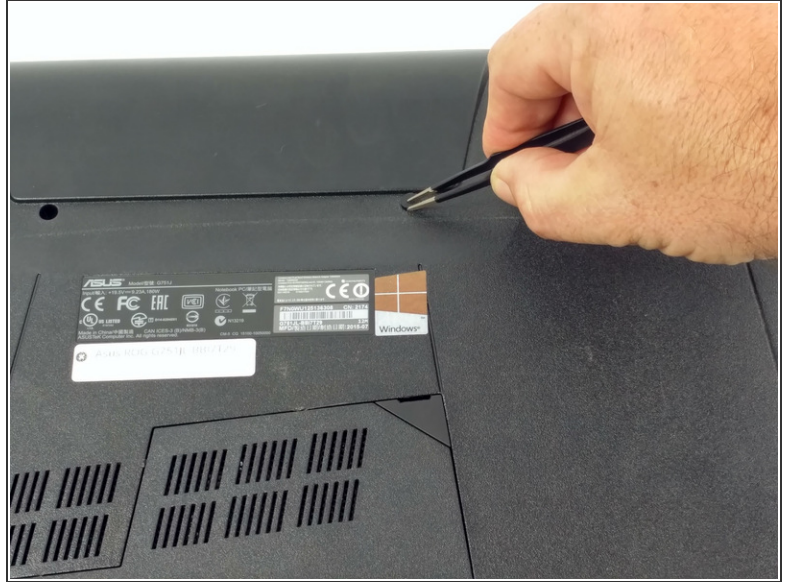

- Begin by removing the top four rubber stoppers that are highlighted in the photo using a pair of tweezers.

## Step 2

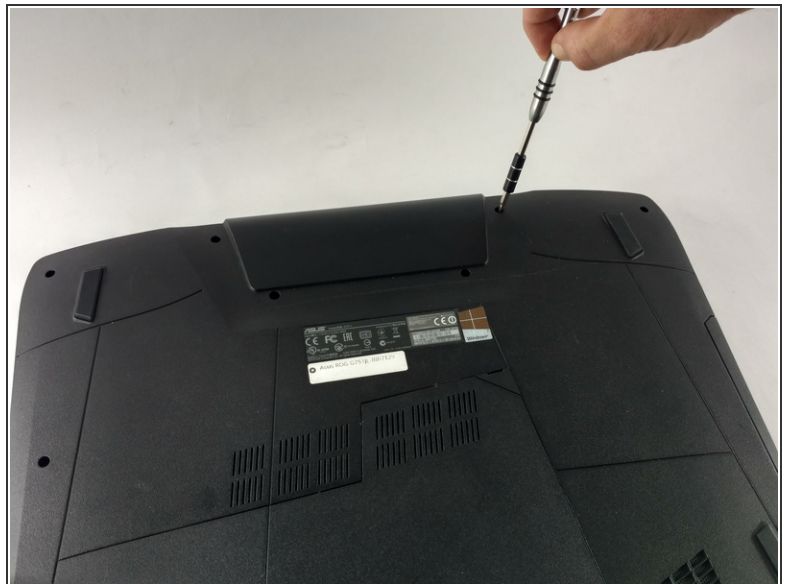

- Remove the top four 8.5mm screws that are highlighted in the photo using a Phillips screwdriver.

## Step 3



- The speakers are located on the top facing side of the computer, next to where the screen connects to the base.
  - Using a nylon spudger, carefully pry the top back panel off to reveal the speakers.
- ⚠ While removing the top back panel, be careful not to break the four pin connector located underneath.



## Step 4



- Disconnect the four-pin connector and remove the top back panel from the computer.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 09:02:53 PM.